




The **B2 (Bubba) Dissolvable Frac Plug** utilizes industry leading dissolvable technology to provide a dependable, cost-effective dissolving frac plug that leaves no metal to be cleaned out of the wellbore post-frac - resulting in easier lateral cleanouts and valuable time savings for operators.

Features and Customer Benefits

- Available in 3.5", 4.0", 4.5", 5" and 5.5" sizes
- Compact design - the plug is less than 9" in length during run in and weighs 5 lbs or less
- Upper and lower slip designed with ceramic buttons
- Sets securely in casing up to 125ksi material grade
- Eliminates risk of sticking wireline or coil tubing throughout the life cycle of the plug
- If needed, can be drilled out using conventional rigid tubing or coiled tubing
- Plug is 96% Dissolvable Material
- Rated to 10,000 psi at 350°F

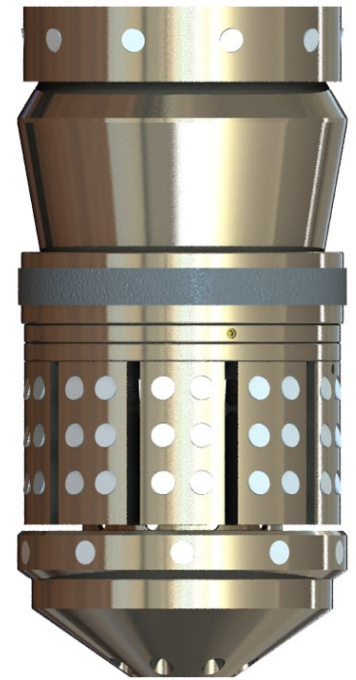

Casing Size		Casing Weight		Tool OD		Plug
inches	mm	lbs/ft	kg/m	inches	mm	Assembly Number
3.500	88.9	9.2 - 10.2	13.69 - 15.18	2.700	68.58	T394-35-270
4.000	101.6	11.6	17.26	3.135	79.63	T394-40-310
4.500	114.30	11.6 - 13.5	17.26 - 20.09	3.660	92.96	T394-45-367
4.500	144.30	13.5 - 15.1	20.09 - 22.47	3.580	90.93	T394-45-358
5.000	127.00	18 - 21.4	26.79 - 31.85	3.875	98.43	T394-50-387
5.500	139.70	17 - 20	25.29 - 29.76	4.480	113.79	T394-55-448
5.500	139.70	20 - 23	29.76 - 34.22	4.385	111.38	T394-55-438
5.500	139.70	23 - 26	34.22 - 38.69	4.275	108.59	T394-55-419